

Go Mobile!

Revolutionizing On-Course Fitting & Repair

GOLF CART STAND



- › *Bend Clubs Anywhere On The Course*
- › *Putter Fittings At The Practice Green*
- › *Replace Grips On The Driving Range*



CALL: 800-437-1314 CLICK: MITCHELLGOLF.COM

Turns Golf Cart Into
Mobile Fitting & Repair Station

Instructions: Golf Cart Stand

1.

Position Golf Cart Stand in center of bag well of cart.

Fits Most Makes
& Models Of Golf Carts




2.

Place **Clamshell Clamp** over bottom of bag well and tighten two nylon clamps to bottom of stand drawing tight against undercarriage of bag well.




3.

Insert bag straps through **Bag Strap Fixture** vertical bars next to the stand body. Pull straps tight and lock in golf cart strap clamps.

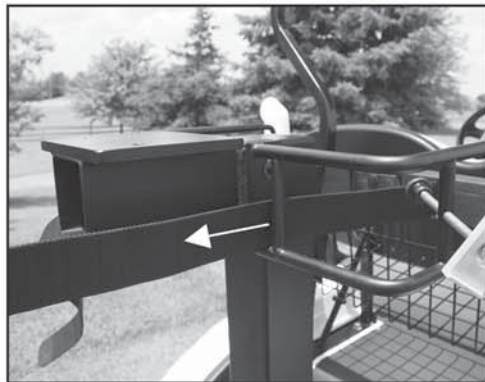


4.

Align **Bag Strap Tension Brackets** with width of bag straps and tighten with threaded rod to firmly secure bag straps.

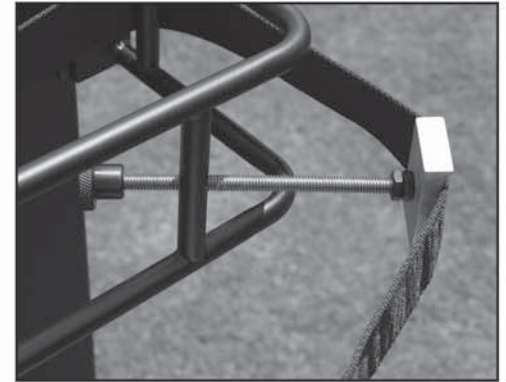

5.

Install Mitchell Angle Machine or Grip Station to top of stand with two mounting bolts provided with Angle Machine or Grip Station.

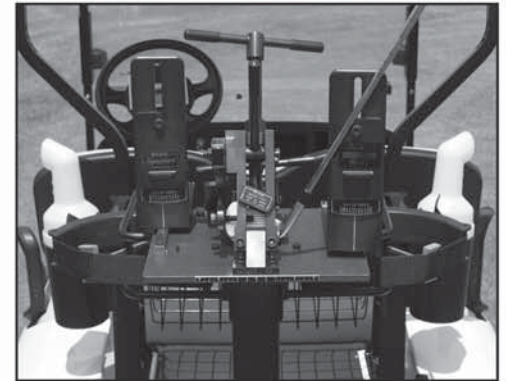

! IMPORTANT

Do not transport Mitchell Angle Machines on Golf Cart Stand before providing a method to secure gauge assemblies.

Do not transport Grip Station on Golf Cart Stand with drip pan attached. Install after you arrive to work area.

Properly dispose of excess grip solvent before transporting, storing or removing Grip Station from Golf Cart Stand.



NOTE: Grip solvent will destroy grass areas.

**Reverse Steps To Remove
Angle Machine / Grip Station & Golf Cart Stand**